
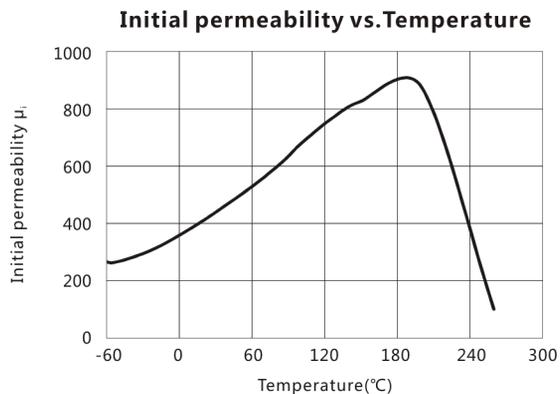
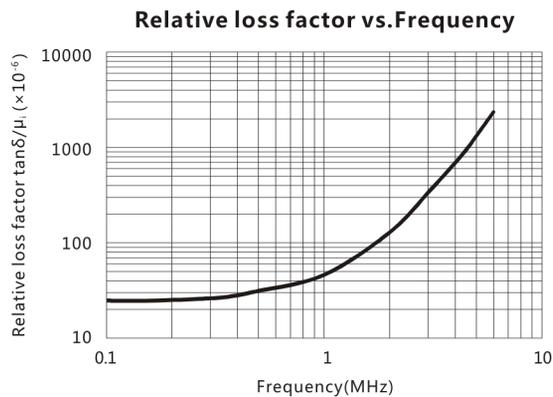


材料 / Material: TN40H

特点 / Features:

1. 耐热冲击 / Thermal Shock Resistance

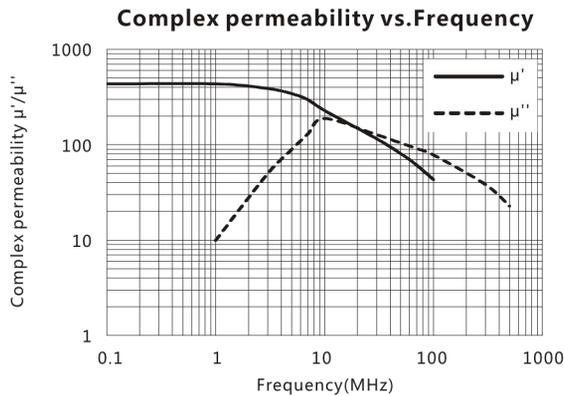

Initial permeability	μ_i	25°C	400±20%
Saturation magnetic flux density	B_s (mT)	25°C	410
Relative loss factor 100kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤25
Relative temperature coefficient	$\alpha_{\mu_{ir}}$ ($\times 10^{-6}/^{\circ}\text{C}$)	20 ~ 60°C	25
Curie temperature	$T_c(^{\circ}\text{C})$		>250
Electrical resistivity	$\rho(\Omega\cdot\text{m})$		10^6
Density	$d(\text{kg}/\text{m}^3)$		5.1×10^3

Test core : Toroid(mm)

OD : 12.7

ID : 7.9

H : 6.5

